


## Assembling the Elless Water Saving Showers and Hoses:

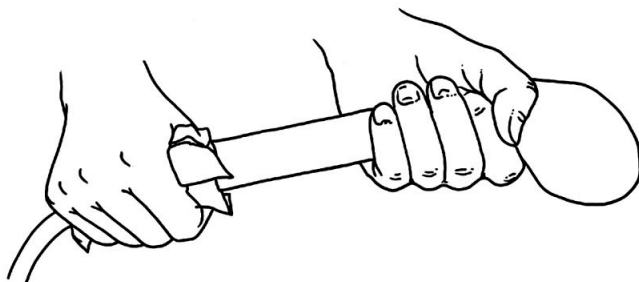


There are no tools needed to assemble the Elless Water Saving Hose. It's easy to make it fit tight only by using your hands. Use a damp towel for a tighter grip.

The Elless Water Saving Hose requires no gasket between hose and hand shower, unlike other hoses. Enclosed gaskets are mainly meant for assemblage in the connection between hose and mixer tap.

The Elless Water Saving Hose saves between 1 and 2 litres/minute extra combined with our Water Saving Showers. The Water Saving Hose is not suitable in low pressure systems (below 3 bars).

The Elless Water Saving Hose has a conical nut in one end and a cylindrical one in the other end, but the threads are the same in both ends. Choose the model that fits best considering the suspension device for the shower handle and the design of the mixer tap.

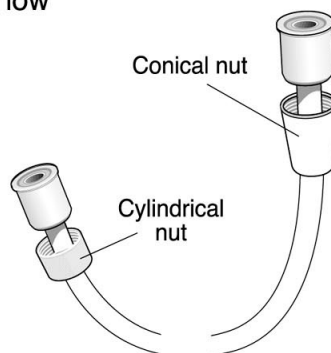

# ELLESS<sup>®</sup>

WATER SAVING SYSTEM

LUNDBERG & SON  
VVS-PRODUKTER AB

Kaggeholmsvägen 45, 122 60 Enskede  
Ordertel: 08- 600 50 02 • Fax 08 - 600 50 07

E-post: [info@elless.com](mailto:info@elless.com)

Försäljningskontor Halmstad: